

# Gömbvégű imbuszkulcs

220/3S



## Használat



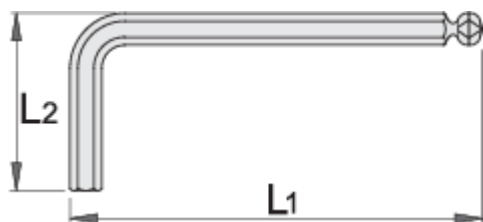
## Termékjellemzők

- anyaga: Premium króm-vanádium acél
- teljes anyagában nemesített
- felületkezelés: nikkelezett

## Profilok



[\(/hu/about-us/materials\)](/hu/about-us/materials)  [\(/hu/support/warranty\)](/hu/support/warranty)



L1

L2



607826

1.5

46.5

15.5

5




607827

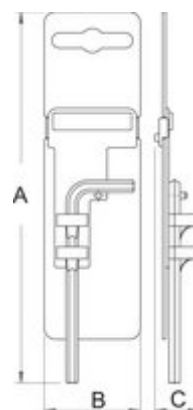
2

52



18

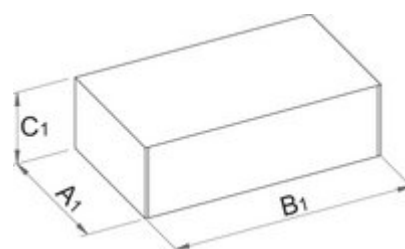
6

		L1	L2	
607828	2.5	58.5	20.5	7
607829	3	66	23	10
607830	4	74	29	15
607831	5	85	33	23
607832	6	96	38	35
607834	8	108	44	65
607835	10	122	50	108






### Kiskereskedelmi csomagolás

	MA	MB	MC	
607826	120	44	8,2	10
607827	115	44	8,2	11
607828	120	44	8,2	12
607829	125	44	8,2	15
607830	130	44	8,2	20
607831	155	44	20	28
607832	160	50	20	40
607834	170	55	20	70
607835	180	60	20	113



### Szállítási csomagolás

		TA	TB	TC	
607826	4	65	211	38	165

		TA	TB	TC	
607827	4	65	211	38	169
607828	4	65	211	38	173
607829	4	65	211	38	185
607830	4	65	211	38	205
607831	4	71	243	42	237
607832	4	71	243	42	285
607834	4	71	243	42	405
607835	4	71	243	42	577