

Ráverő kalapács

817



Profilok



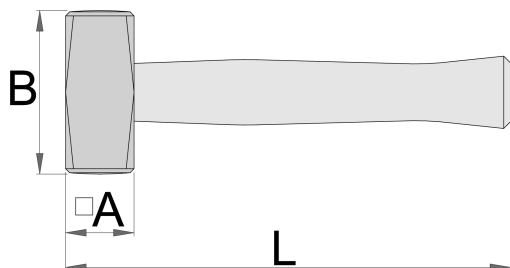
(</hu/support/warranty>).




Termékjellemzők

- anyaga: Premium Flex Plus szénacél
- kovácsolt
- ütőfelületek indukciósan edzettek
- felületkezelés: lakkbevonat
- kőrisfa nyél, speciális ovális ékkel
- DIN 6475 szabvány szerint

Szabványok

DIN 6475



		A	L	B	
601840	1000	40	260	95	1065
601841	1250	43	260	100	1305
601842	1500	45	280	115	1525



gr

A

L

B



601843

2000

50

300

120

2050



Kiskereskedelmi csomagolás

	MA	MB	MC	
601840	93,5	260	39,5	1070
601841	102,5	260	42	1310
601842	110	270	44,4	1530
601843	117,5	300	49	2055

Szállítási csomagolás

		TA	TB	TC	
601840	1				
601841	1				
601842	1				
601843	1				

Pótalkatrészek



Fa kalapácsnyél ovális ékkel



Ovális ék kalapácsnyélhez